




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61B 5/05, 5/107	A1	(11) International Publication Number: WO 99/23945 (43) International Publication Date: 20 May 1999 (20.05.99)
(21) International Application Number: PCT/AU98/00925 (22) International Filing Date: 5 November 1998 (05.11.98) (30) Priority Data: PP 0310 10 November 1997 (10.11.97) AU (71) Applicants (for all designated States except US): FIELDS, Eden, Elizabeth [US/US]; 2636 Sawyer Drive, Seabrook, TX 77586 (US). TROELL, Martha, Elizabeth [US/US]; 1019 Montour, Houston, TX 77062 (US). (71)(72) Applicant and Inventor: CLIFT, Vaughan, Lennox [AU/US]; 807 Noble Springs Road, Houston, TX 77062 (US). (74) Agent: GRIFFITH HACK; 509 St. Kilda Road, Melbourne, VIC 3004 (AU).	(81) Designated States: AU, CA, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.	
(54) Title: SKIN IMPEDANCE IMAGING SYSTEM		

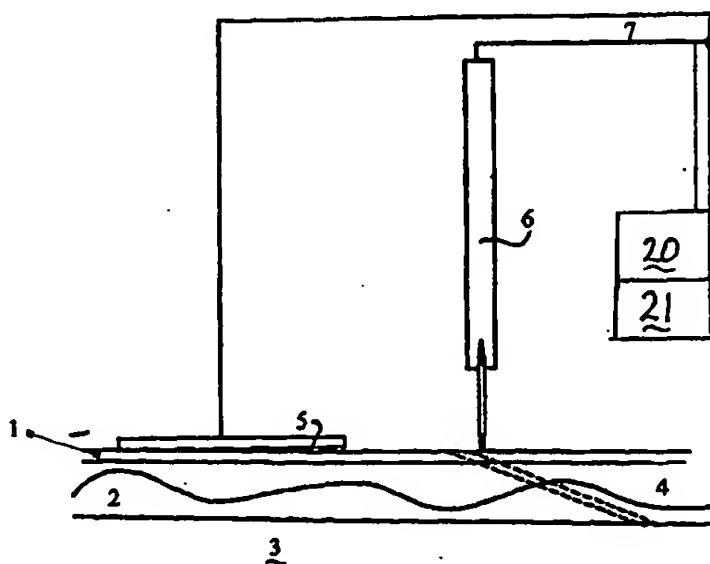

(57) Abstract

A skin impedance imaging system is disclosed which comprises a probe (6) having an electrode which is intended for movement over a patient's skin. A reference electrode (5) is applied to the patient's skin and an alternating current is supplied to the probe (6) and/or reference electrode (5) so the current flows through the patient's skin. An alternating current supply (20) and a device for measuring voltage changes (21) are provided so that a measure of the impedance of the skin can be obtained, thereby providing an indication of the induced or pathological changes in the skin. An image of the impedance changes across various areas of the skin can be produced.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SKIN IMPEDANCE IMAGING SYSTEM

5

Background

The skin of a living creature conducts electricity differently depending on the frequency and voltage that is applied. This property is referred to as electrical impedance (complex skin impedance). Changes in the skin at different levels effect the resistance to an applied electrical voltage differently. Changes in conductivity at the very surface of the skin effect its resistance to a direct current (DC) applied across the skin. The resistance of the skin to a DC voltage is generally very high in the order of 10 megaohm but certain changes, for example, thinning of the outer dry layer (epidermis) decreases this significantly as do changes in the oil content of the outer layer.

By contrast, very high frequency alternating currents, above one megahertz for example, are not always greatly effected by the changes in the upper layers of the skin. Many frequencies pass through the skin and are effected more by the volume of tissue they pass through below. Therefore different frequencies may identify changes at different depths through the skin.

30 The skin is itself not a simple structure microscopically or electrically. It is made up of two major layers; the outer epidermis and the inner dermis. The dermis contains the vessels, nerves, immune cells and supportive structural

- 2 -

collagen. Its appearance under the microscope varies to some extent from one part of the body to another both in thickness and composition. The upper layer of the dermis is a single layer of cells from which comes the scaly layer that make up the epidermis. These scales form as tightly connected cells which dry out and thin as they migrate to the surface where they eventually slough or flake off.

Changes in the blood flow in the dermis, changes in the water content of the dermis, changes in acidity and even changes in the cell populations in the dermis may alter the resistance to electricity differently. The thickness of the epidermis and its water content will have an effect.

One other compounding factor is that electricity follows the path of least resistance, therefore it should be noted that, increasing the surface area of the contacting electrode changes the measured resistance. However, once through the skin, electricity behaves as it would passing through a bag filled with salty water.

Description of the invention

It was discovered that this property of the differing changes in the skin causing different changes to the electrical impedance of the skin could be used to determine local pathology within the skin. A great deal is known about the effect of skin on the normal use and function of skin applied electrodes. The localised pathological effects are not known. Even though greatly different pathological changes may cause identical changes in electrical impedance at some frequency, the ability to distinguish between

- 3 -

normal and abnormal skin, producing a contrast, would allow the formation of an image or demarcation line. This has tremendous benefit to medical practice.

5 Even if specific pathology can not be identified, for example, cancerous growths of different types may produce the same electrical change, the system still provides tremendous advantage by separating healthy from abnormal. Two particular examples are the determination of depth of a
10 burn and the identification of localised pathology such as in situ skin tumours and immune response to an injected antigen.

Burns penetrate to differing degrees through the epidermis
15 and dermis. If only the epidermis is destroyed, then the burn is minor and will heal without scar. If the dermis is completely destroyed then the burn will not heal without tremendous scar formation and the dead skin will have to be removed and tissue grafted into place. In between these two
20 extremes are varying degrees of healing that may or may not require any surgical intervention. The problem which has afflicted burn surgery, even to the present day, is that there is no reliable way to determine the depth in these transition areas. The surgeon must wait, often for a week,
25 until the body itself declares the region that needs to be removed. This is done either by identifying a line of healing at the edge where the body is trying to remove the dead tissue or, by a pattern of bleeding which is visible when the surgeon cuts through the skin tangentially.

30

The problem with the delay is that during this period the "burns patient" suffers severe fluid and metabolic disturbances and is at risk of fatal sepsis. In children

- 4 -

this is particularly difficult to manage and is often the cause of death days after the burn. If it were possible to identify the area to be excised then this period could be avoided. Even if there is no serious consequence in the short term, the release of tissue factors by the dead and dying tissue induces scar formation which is often disfiguring and the worst consequence of the burn itself.

The present invention provides a method for measuring or imaging induced or pathological changes in the skin using electrical impedance, said method including:

- applying an alternating electrical current to the skin through an electrode or multiple electrodes;
- measuring the change to the applied electrical current produced by the relative impedance of the underlying skin; and
- producing a representation of the relative measurement for differing areas of skin.

The present invention also provides an apparatus for measuring or imaging induced or pathological changes in skin, said apparatus including:

- a measurement electrode for movement across the skin;
- at least one reference electrode for application to the skin;
- means for providing an alternating electrical current, coupled to the measurement electrode and/or reference electrode for supplying the current to the measurement electrode and/or reference electrode; and
- means for providing a measure of the change in the alternating current indicative of the change in impedance of the skin as the measurement electrode is moved

- 5 -

over the skin to provide an indication of the induced or pathological changes in the skin.

Using a pen-like probe and frequencies in the range of, for
5 example, 2 to 100 kHz, the difference between live and dead
tissue and the damaged tissue in between can be mapped
electrically. This can be used to produce a graphical image
on the screen or a to draw changes on the skin using a
printing system to identify the depth of the burn for the
10 surgeon.

The probe needs to be grounded. Using a larger surface area
probe tends to decrease the influence of the skin under
that electrode. Therefore, changes in the moving electrode
15 or, alternatively, in an array of pin point electrodes can
be used to map an area of interest.

Another example is the demarcation of an intradermal
cancer. Many cancers, such as melanoma, spread
20 imperceptibly through the skin invisible from above. No
such spreading occurs with benign skin lesions. Graphing
the skin with an array or moving probe may identify deep
changes in the dermis which would otherwise only be visible
on an excised and specifically stained section.

25 When a tuberculosis test is performed, the skin is injected
with an antigen and the immune cells of the body are
attracted and form a swelling. If the reaction is large,
then the physician knows that the individual has been
30 exposed to TB. Unfortunately, the test is often badly
performed because there is no objective way to determine
the volume of the reaction. Instead, a practitioner tries

- 6 -

to feel the area of thickening in the skin produced by the reaction and then measure this in millimetres.

The method described here can be used to map changes in impedance and therefore indicate areas of pathology such as damage due to burn, invasion by cancerous cells of the accumulation of an immune response. The essence of the device is not to measure in absolute impedance measurement as the skin's impedance can vary markedly from individual to individual, in different areas of the body and overtime, but to compare and indicate significant local differences in impedance compared to the normal surrounding skin.

In the following, the invention will be explained, by way of example, with reference to the drawings, wherein:

Figure 1 schematically shows the skin and the applied single point electrode; and

Figure 2 schematically shows the skin and the applied multiple electrode apparatus.

Skin thickness varies in different parts of the body but within certain limits. Typically, in an adult, it is a little less than 1 mm thick. A single point electrode can be placed in different parts of the body to give relative measures of the absolute skin impedance. An alternating current is placed across two electrodes separated by some distance, usually several centimetres, and the resistance to the applied voltage can be measured. The measurement can be made by measuring the voltage directly across the two electrodes themselves or between one of the two source electrodes and a third electrode placed on the skin.

- 7 -

Figure 1 illustrates one preferred embodiment. The layers of skin are the epidermis 1 and the dermis 2. The tissue below the skin is referred to as the subcutaneous layer 3. One important feature of the subcutaneous layer is that it is essentially one large relatively homogeneous volume. Once a current passes through the skin at one point, it can pass through innumerable pathways to any part of the skin on the body. This is important to the principle employed in this invention. In this invention, the absolute impedance is of less importance than the relative impedance of one area of skin compared to its neighbour. In Figure 1, the area of damaged tissue 4 will be measured relative to the normal skin 1 and 2, as the probe 6 is moved over it.

The reference electrode 5 represents a large surface area electrode. In one configuration there may be two such electrodes (second not shown) and the source voltage is applied to them. The measurement is made between one of the two electrodes and the sensing probe 6. In Figure 1, only one electrode is visible and this configuration can be used directly with certain signal generating circuits. In both configurations, the electrodes are connected by wires 7 to some means of generating an alternating current or oscillating signal and a means to measure the voltage changes. The means for generating the signal and measuring the voltage are many and varied and not specific to the method.

The larger surface area electrode permits the signal to penetrate the skin through a lower resistance than at the measuring point. To the measuring probe itself it is as if the electrode were below the skin and the current passes directly through the skin more or less at right angles to

- 8 -

the surface. In reality, the reference electrode and detecting electrode have to be within millimetres of each other for much of the current to pass along the skin between them rather than through the skin, then through the body and then out through the skin at some distant point.

When direct current is used most of the resistance is produced at the contact boundary layer. The resistance can be seen to increase over time and this is due to the build up of charge so called galvanic resistance. This does not occur with alternating current. The voltages typically used are in the range of a few volts and are not only of little consequence they are generally imperceptible. The higher the frequency the higher the voltage that can be applied without detrimental effect.

The sensing probe can have differing materials and geometry for different application but is typically a copper wire of 0.5 mm diameter. Silver, gold and carbon are excellent materials and the diameter can be finer for higher resolution. There is a practical limit to the resolution imposed by the skin's thickness itself. The thinner the skin the higher the resolution that might be achieved.

Figure 2 illustrates a second preferred embodiment wherein, instead of a single electrode which is moved across the skin, multiple stationary electrodes 9 are employed. The electrodes 9 are built into a insulated block with a flat end surface 10 with only the ends exposed to make contact with the skin. The electrodes 9 may be built into a three-dimensional array or grid pattern to produce an electrical image of the area covered by them or alternatively into a linear array for measuring across a boundary layer. In the

- 9 -

tion shown, two large surface area electrodes 8 are configured
sh to the block and placed near the electrodes. are attached
the two electrodes 8 can then be used as the One of the
electrode for measurements on each individual reference
of the electrode array 9. As discussed previously, in an alternative element

the electrodes could be placed elsewhere on the body. As
with the previous configuration the electrodes are
connected by wires 11 to both a means for generating the
alternating current signal and means for measuring the
10 impedance. Many arrangements for measurement of the
impedance are possible and are not specific to the method.
The probe would be placed over normal skin to produce a
reference image and then over an area of suspected
pathology to produce an image. Because the geometry of the
15 electrodes are known, the method lends itself easily to
measuring the area or distance across a pathological lesion
as a tumour or intradermal inflammatory mass.

The impedance measurements obtained by this method could be
20 used to produce an image on a screen or printed page or
conversely used to guide a printing process directly
applied to the skin to permit a surgeon or physician to
know the size and location of the pathological lesion. The
relative measure is all that is necessary to produce the
25 image and the information of most value may come from the
area or location on the image produced. With finer
resolution and sensitivity to the relative changes in
impedance such as whether it is increased or decreased may
be used to better identify the pathological change. It may
30 be possible thereby to separate inflammation from cancerous
growth or foreign body from infection.

- 10 -

Preferred embodiments of the invention may also utilise a mechanism for determining the position of the electrode 6 in three-dimensional space so that as the electrode 6 moves over the surface of the skin the contour of the skin in three-dimensional space can be measured by the moving electrode. This enables an indication of the skin topography to be provided as well as measurements of the impedance of the skin and therefore the induced or pathological changes in the skin which are desired to be measured.

The described arrangement has been advanced by explanation and many modifications may be made without departing from the spirit and scope of the invention which includes every novel feature and novel combination of features hereindisclosed.

Those skilled in the art will appreciate that the invention described herein is susceptible to variations and modifications other than those specifically described. It is understood that the invention includes all such variations and modifications which fall within the spirit and scope.

CLAIMS:

- A method for measuring or imaging induced or
cal changes in the skin using electrical
said method including:
applying an alternating electrical current to the
ugh an electrode or multiple electrodes; skin thrc
1. pathologi
5 impedance
- measuring the change to the applied electrical
current produced by the relative impedance of the
10 underlying skin; and
producing a representation of the relative
measurement for differing areas of skin.
2. A method as in claim 1 wherein the applied
15 electrical current is in the frequency range from 100 Hz to
1 MHz.
3. A method as in claim 1 wherein the change in
applied electrical current is measured as a voltage change
20 across a resistor.
4. A method as in claim 1 wherein the representation
is produced using a single electrode attached to a system
for determining the electrodes position in three-
25 dimensional space.
5. A method as in claim 1 wherein the representation
is produced graphically on a screen or plot using a two-
dimensional array of electrodes or rotating wheel array or
30 cylindrical array of electrodes.
6. A method as in claim 1 wherein the representation
is produced graphically by printing directly onto the skin.

7. An apparatus for measuring or imaging induced or pathological changes in skin, said apparatus including:
a measurement electrode for movement across the
5 skin;
at least one reference electrode for application to the skin;
means for providing an alternating electrical current, coupled to the measurement electrode and/or
10 reference electrode for supplying the current to the measurement electrode and/or reference electrode; and
means for providing a measure of the change in the alternating current indicative of the change in impedance of the skin as the measurement electrode is moved
15 over the skin to provide an indication of the induced or pathological changes in the skin.
8. An apparatus as in claim 7 wherein the frequency of the alternating current is in the range 100 Hz to 1 MHz
20 and the voltage in the range 1 mV to 20 volts.
9. An apparatus as in claim 7 wherein the representation is in the form of an image on a screen representing both the position and measured effect on the
25 alternating current to provide the change of impedance.
10. An apparatus as in claim 7 wherein the measuring and reference electrode is a two or three electrode design.
- 30 11. An apparatus as in claim 7 wherein the reference electrode is a subcutaneous electrode.

- 13 -

12. An apparatus as in claim 7 wherein a single measuring electrode is attached to a mechanism for determining its relative position in three-dimensional space.

5

13. An apparatus as in claim 7 wherein the measuring electrode is attached to a mechanism for printing directly onto the skin representing the relative electrical impedance change.

10

Figure 1.


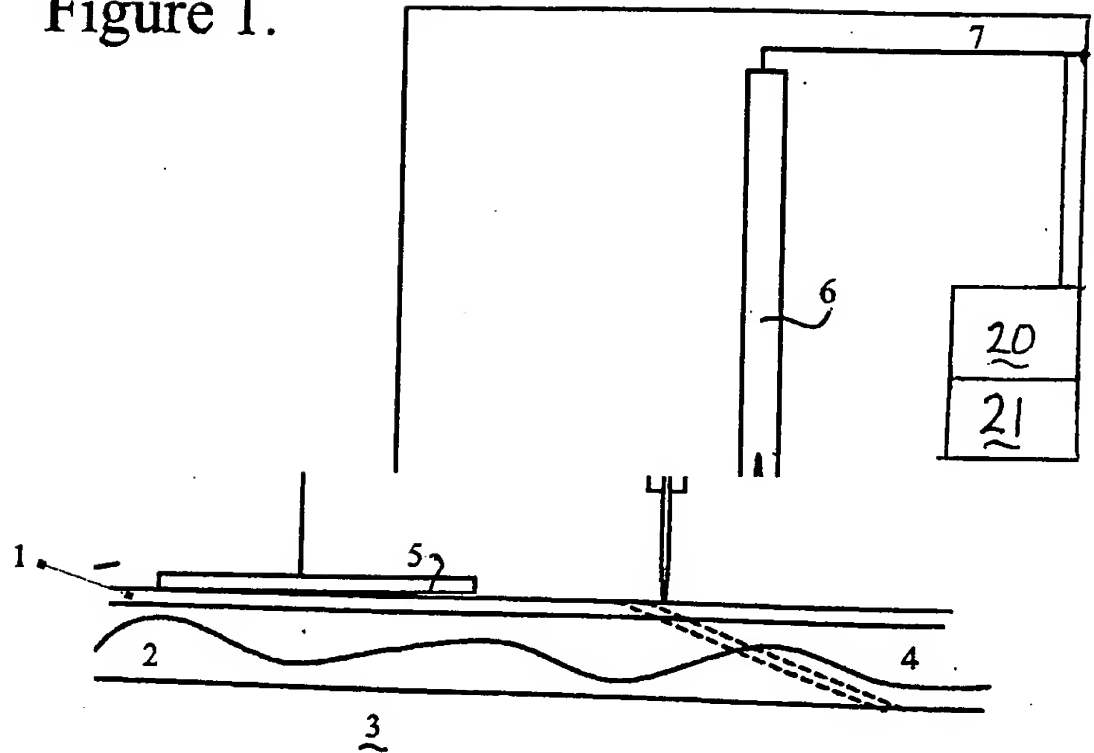


Figure 2.

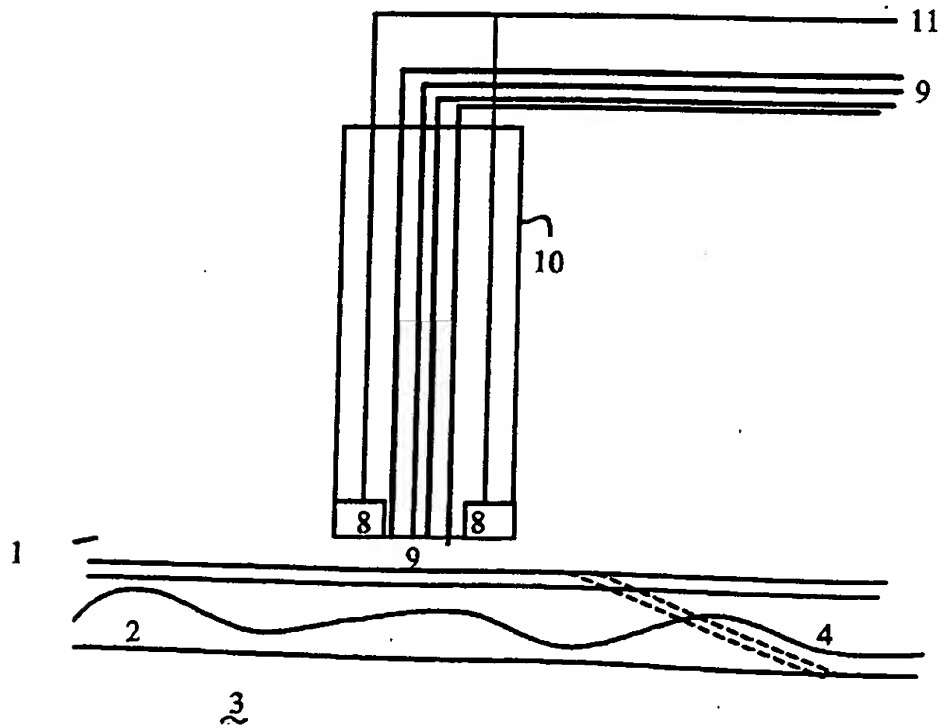

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU 98/00925

A. CLASSIFICATION OF SUBJECT MATTER		
Int Cl ⁶ : A61B 5/05, A61B 5/107		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC: A61B 5/IC		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DERWENT, JAPIO: SKIN, DERMIS, EPIDERMIS, IMPEDANCE, RESIST., CONDUCT., PLETHYSMOGRAPH, MEASURE, DETECT, DETERMINE, RECORD, MAP, IMAGE, PATHOLOG., CANCER, TUMOUR, BURN, WOUND, LESION, ETC.		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CONWAY, J. Electrical impedance tomography for thermal monitoring of hyperthermia treatment: an assessment using <i>in vitro</i> and <i>in vivo</i> measurements; Clin Phys Physiol Meas 1987 Vol 8 Suppl. A 141-146 Figure 5, entire document	1-3, 5-9
X	DT 2726630 A (DUROUX) 22 December 1977	1-3, 7, 8, 10, 11
Y	Entire document	4, 12
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<ul style="list-style-type: none"> * "A" document defining the general state of the art which is not considered to be of particular relevance * "E" earlier application or patent but published on or after the international filing date * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) * "O" document referring to an oral disclosure, use, exhibition or other means * "P" document published prior to the international filing date but later than the priority date claimed 	<ul style="list-style-type: none"> * "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention * "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone * "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art * "&" document member of the same patent family 	
Date of the actual completion of the international search 18 December 1998		Date of mailing of the international search report 12 January 1999
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929		Authorized officer STEVEN WEISS Telephone No.: (02) 6283 2466

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 98/00925

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	EP 538739 A1 (REINHARD) 28 April 1993 Entire document	1-3, 7, 8, 10, 11 4, 12
X	EP 650694 A1 (POLARTECHNICS LTD) 3 May 1995 Column 9 lines 32-33, column 10 lines 14-15	1-3, 7, 8
X Y	WO 90/09759 A1 (INFORMATSIONNO-VYCHISLITELNY TSENTROTDELA ZDRAVOOKHRANENIA PRIMORSKOGO KRAISPOLKOMA) 24 February 1989 Abstract	1-3, 7, 8, 10, 11 4, 12
X Y	Derwent Abstract Accession No. K3774 c/43, class P31, SU 721080 A (VOROSHILOV BM) 25 March 1980 abstract	1-3, 5-11 4, 12
X Y	Derwent Abstract Accession No. 86-154602/24, class P31, SU 1191058 A (AS USSR NEUROPHYSIO) 15 November 1985 Abstract	1-3, 7, 8, 10, 11 4, 12
P, X	Derwent Abstract Accession No. 98-326130/29, class S01 S03 S05, JP 10118041 A (POLYTRONICS KK) 12 May 1998 abstract	1-3, 7, 8, 10, 11
X Y	WO 93/07809 A1 (REINHARD) 29 April 1993 abstract	1-3, 7, 8, 10, 11 4, 12
Y	US 5517990 A (KALFAS et al.) 21 May 1996 entire document	4, 12
Y	US 5383454 A (BUCHOLZ) 24 January 1995 entire document	4, 12

INTERNATIONAL SEARCH REPORT **Information on patent family members**

International application No.
PCT/AU 98/00925

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
EP	650694	AU	77461/94	CA	2134423	CN	1106246
		US	5800350	ZA	9408393	JP	7250837
US	5517990	EP	600610	JP	7148180	US	5309913
		US	5732703	US	5776064	EP	676178
		JP	8052115				
US	5383454	AU	88763/91	EP	553246	SE	9301262
		WO	9206645	US	5622170	AU	66668/94
		CA	2161126	EP	700269	IL	109385
		WO	9423647	ZA	9402812		
GB	2257530	EP	591341	US	5575292	WO	9300038
DE	2726630	FR	2354745	GB	1559260	US	4078553
EP	538739	AU	26981/92	BG	97976	BR	9205476
		CN	1071826	CZ	9301245	DE	4134960
		FI	932889	HK	1171/95	HU	71137
		IL	103450	MX	9206036	NO	932293
		NZ	244848	NZ	272337	PL	299379
		SI	9200272	US	5421344	WO	9307809
		ZA	9208094				
END OF ANNEX							

This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)